

TCME32 Series

32.768kHz TCXO, 3.2 x 2.5mm, HCMOS



REACH and RoHS compliant
µA current consumption




Parameters		Specification		Remarks
Frequency		F_nom	32.768kHz	
Supply voltage		Vcc	1.8V, 2.5V, 3.0V, 3.3V, 5.0V	±5% voltage change, ±10% for 5V
Supply voltage variation			0.25V max	$\Delta V/\Delta T = 1V/us$
Initial frequency tolerance		F_tol	±1.5ppm max	At +25°C±3°C
Frequency stability	vs Temperature	F_stb	±5.0ppm	
	vs Load change	F_load	±0.2ppm max	±10% load condition change
	vs Voltage change	F_Vcc	±0.2ppm max	±5% input voltage change
	vs Aging	F_age	±3.0ppm/year max	At +25°C
	vs Reflow		±1.0ppm/year max	1 reflow and measured after 24hrs
	vs all range Vcc		±1.0ppm/volt max	Vcc = 1.7V to 5.5V
Operating temperature range (°C)		Topr	-40°C ~ +85°C	Table 1
Storage temperature (°C)		Tstg	-55°C ~ +85°C	
Output waveform			HCMOS	
Output load			15pF	
Output voltage high		Voh	Vcc - 0.4V min. Ioh = -0.1mA	For all Vcc range
Output voltage low		Vol	0.4V max. Iol = 0.1mA	For all Vcc range
Current consumption		Icc	0.79µA ~ 2.05µA	Table 2
Rise and fall time		Tr, Tf	100ns max	20% to 80% of waveform
Duty cycle		SYM	40%/60% typical	Measured at 50% Vcc
Start-up time		T_str	1.0 sec max at 25°C	3.0 sec max at -40°C~+85°C
Pad 1 OE thresholds			Vih = 0.8Vcc, Vil = 0.2Vcc	
Timing error over time			±0.432sec/day	For ±5ppm over -40°C ~ +85°C

Note: The device is ESD sensitive and moisture sensitive level (MSL) - 1

Table 1. Supply voltage vs current consumption

Supply voltage (V)	Current consumption Icc (µA)
1.8V ± 5%	0.79µA
2.5V ± 5%	1.05µA
3.0V ± 5%	1.25µA
3.3V ± 5%	1.37µA
5.0V ± 5%	2.05µA

Dimensions(Unit:mm)

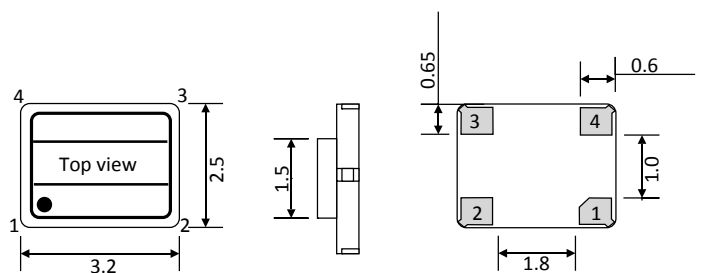

Pad 1 : Output enable
Pad 2 : Ground
Pad 3 : Output
Pad 4 : Supply voltage

Pad 1	Pad 3 (Output)
Enable (>Vcc*0.8)	Active
Disable (<Vcc*0.2)	High impedance

ACT (A wholly owned Acal BFi Company)
+44 (0) 118 978 8878 | sales@act.co.uk | www.act.co.uk

ISO9001 Registered

Specifications subject to change without notification

TCME32 Series


32.768kHz TCXO, 3.2 x 2.5mm, HCMOS




TCXO part number generation											
TC32M	00003	F	B	B	N	B	X	X	S	L	-PF
ACT series Code	Frequency (MHz) Ex. 32.768kHz	Temp. stability (±ppm)	Supply voltage (V)	Operating temp. range (°C)	Frequency tuning (±ppm)	Output wave	Mechanical tuning (±ppm)	Polarity	Duty Cycle	Tape & Reel	RoHS Code
TC32M	5 digit require to specify kHz frequency. ≤ 99.99kHz 10=00001 32.768=00003 ≥ 100kHz 100=00010 250=00025	5.0 = F	1.8V = D 2.5V = C 3.0V = E 3.3V = B 5.0V = A	-40 ~ +85 = I	None = N	HCMOS = E	None = X	None = X	40%/60% = S	Loose = L 1000 = C 3000 = D	-PF

Note: It is important to suffix the above part number with full frequency required to give a completed part number as illustrated below.
Full Example part number : **TC32M00003FBBNEXSL-PF [32.768kHz]**


Test circuit

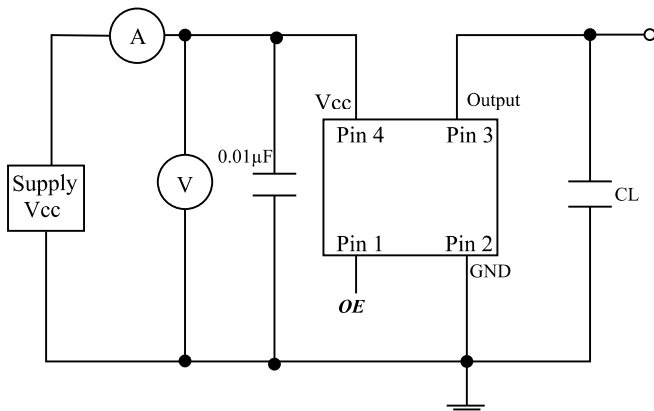

Test waveform

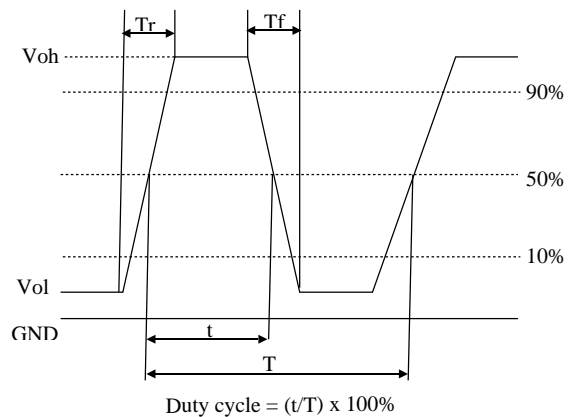

Solder reflow profile

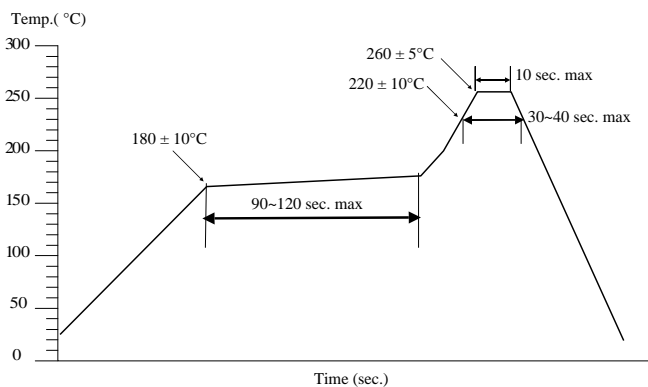

Drawing control: (Internal use only)
Commodity code: 854370 90 99
Issue number : 1
Date : 01/02/2017
Internal reference : M6