

3225G SMX-4 Series



3.2 x 2.5mm Crystal unit

RoHS & REACH compliant
Small package size
Glass sealed crystal



Parameters	Specification	Remarks
Frequency range	F_nom 10.0MHz ~ 64.0MHz	Fundamental
Frequency tolerance	F_tol ±10.0ppm ~ ±50.0ppm	
Frequency stability over operating temperature range	F_stb ±10.0ppm ~ ±50.0ppm	Table 2
Operating temperature range	T_use -20°C ~ +70°C, -30°C ~ +85°C, -40°C ~ +85°C	Table 2
Storage temperature	T_stg -55°C ~ +125°C	
Load capacitance	CL 6.0pF ~ 20.0pF	
Equivalent series resistance	ESR Table 1	
Shunt capacitance	CO 3.0pF max	
Drive level	DL 200µW max	100µW typical
Frequency aging	F_age ±2.0ppm at 25°C, 1 st Year	For ±1.0ppm please enquire
Moisture sensitivity level	MSL 1 (unlimited)	
Electrostatic discharge	ESD Not applicable	
Insulation resistance	IR 500MΩ min	At 100V DC


Table 1. Frequency range (MHz) vs ESR

10.0MHz ~ 11.999MHz	150Ω
12.0MHz ~ 19.999MHz	100Ω
20.0MHz ~ 23.999MHz	70Ω
24.0MHz ~ 64.000MHz	50Ω

Table 2. Frequency stability vs temperature

Temp. (°C)	Stability in ppm				
	±10	±15	±20	±30	±50
-10°C ~ 60°C	✓	✓	✓	✓	✓
-20°C ~ 70°C	✓	✓	✓	✓	✓
-30°C ~ 85°C	Enquire	✓	✓	✓	✓
-40°C ~ 85°C	Enquire	Enquire	✓	✓	✓

Dimensions (mm)

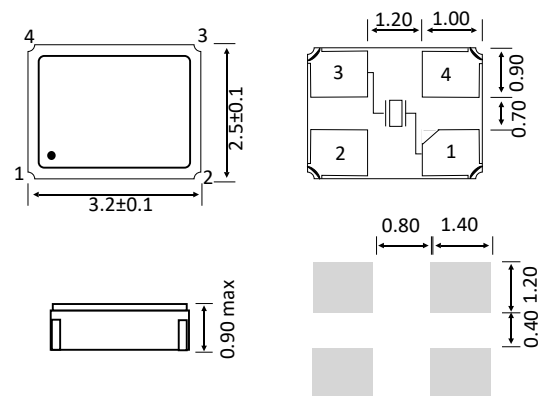

Part number generation

BGT	2700	G	K	L	GO	F	L	-PF	
ACT Series Code	Frequency (MHz)	Frequency tolerance (±ppm)	Frequency stability over temperature range (±ppm)	Operating temperature Range (°C)	Load capacitance (CL -pF)	Frequency mode	Packaging (Tape & Reel)	Frequency aging	RoHS
BGT	8MHz = 0800 27MHz = 2700 Note: Use the first 4 characters of the frequency in Hz i.e. 27MHz = 27000000Hz If the frequency is 100MHz or higher then the first 5 characters are used	±10 = E ±15 = F ±20 = G ±30 = I ±50 = L	±10 = F ±15 = G ±20 = I ±30 = K ±50 = O	-10 ~ +60 = E -20 ~ +70 = G -30 ~ +85 = L -40 ~ +85 = M	6 = BO 8 = GO 9 = JO 10 = KO 12 = OO 14 = ZO 16 = RO 18 = TO 20 = VO	Fundamental = F	Loose = L 3000pcs = D	<u>Standard</u> ±2ppm = leave blank for standard aging. <u>Non standard</u> ±1ppm = 1	RoHS = -PF

Note: It is important to suffix the above part number with full frequency required to give a completed part number as illustrated below.

Full Example Part Number : BGT2700GKLGOL-PF [27.000MHz] , BGT2457GKLGOL-PF [24.576MHz]

ACT (A wholly owned Acal BFi Company)

+44 (0) 118 978 8878 | sales@act.co.uk | www.act.co.uk

ISO9001 Registered


Specifications subject to change without notification

3225G SMX-4 Series

3.2 x 2.5mm Crystal unit



Solder reflow profile

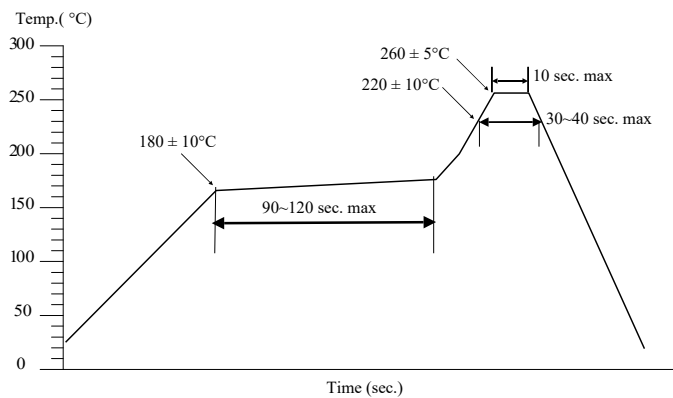

Additional information

Drawing control: (Internal use only)
Commodity code: 854160 00 00
Issue number: N1
Date: 11/5/2018
Internal reference: H2

ACT (A wholly owned Acal BFi Company)
+44 (0) 118 978 8878 | sales@act.co.uk | www.act.co.uk
ISO9001 Registered
Specifications subject to change without notification