



SAW BANDPASS FILTER

PART NO.: ACTFH015-740SA-1109

Product Type:	Customer:
SAW filter for BAND 17 (Rx)	
	Customer Part NO.:
	Issued Date:


Features

SAW filter for BAND 17 (Rx).

- 1 High stability and reliability with good performance.
- 2 Single ended to Single ended.
- 3 Narrow and sharp pass band characteristics. RoHS compatible.
- 4 Low insertion loss and deep stop band attenuation for interference.
- 5 Package size 1.1mm*0.9mm

Package Dimensions

Ceramic Package: Unit: mm

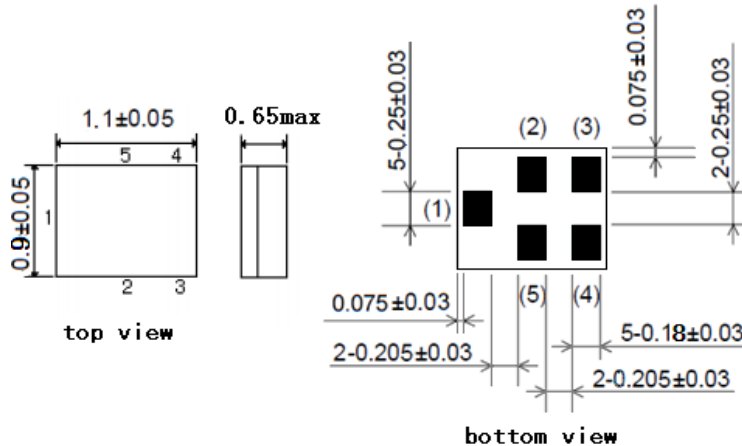


Pin Configuration

1	Input
4	Output
2,3,5	Ground

Marking

Top View, Laser Marking



"a6" Part number

"•" Dot marking, indicates input 1

"1" Terminal 1

The first "*": Month Code (The code shown below varies in a 4-year-cycle)

Month	1	2	3	4	5	6	7	8	9	10	11	12
2016/2020	n	p	q	r	s	t	u	v	w	x	y	z
2017/2021	A	B	C	D	E	F	G	H	J	K	L	M
2018/2022	N	P	Q	R	S	T	U	V	W	X	Y	Z
2019/2023	a	b	c	d	e	f	g	h	i	j	k	m

The second "*": Date Code

data	1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th	
code	A	B	C	D	E	F	G	H	J	K	
data	11th	12th	13th	14th	15th	16th	17th	18th	19th	20th	
code	L	M	N	P	Q	R	S	T	U	V	
data	21st	22nd	23rd	24th	25th	26th	27th	28th	29th	30th	31th
code	W	X	Y	Z	a	b	d	e	f	g	h

Maximum Ratings

Rating		Value	Unit
DC Voltage (between any Terminals)	V_{DC}	10	V
RF Power (in BW)	P	15 dBm /2000hr@55°C	
Operating Temperature Range	T_A	-30 ~ +85	°C
Storage Temperature Range	T_{stg}	-40 ~ +85	°C
ESD Voltage (HB)	V_{ESD}	>150	V
Moisture Sensitivity Levels	MSL	2A	


Electrical Characteristics:

Item		Minimum	Typical	Maximum	Unit	
Insertion Loss	IL					
		734.25 ... 745.75 MHz		1.7	2.4	dB
Passband Ripple	Pr					
		734.25 ... 745.75 MHz		0.4	1.0	dB
VSWR	V_{swr}					
		734.25 ... 745.75 MHz		1.7	2.1	
Absolute Attenuation	α					
		1 ... 704 MHz	45	53		dB
		698 ... 716 MHz	46	50.4		dB
		704.25 ... 715.75 MHz	46	50.4		dB
		716 ... 722 MHz	25	49		dB
		722 ... 727 MHz	4	22		dB
		727 ... 728 MHz	3	10		dB
		776 ... 793 MHz	32	33.5		
		793 ... 805 MHz	33	50		
		2400 ... 2500 MHz	32	40		
814 ... 6000 MHz	25	29			dB	
6000 ... 8500 MHz	15	22			dB	
Input / Output Impedance (Nominal)			50		Ω	

 RoHS Compliant


 Electrostatic Sensitive Device

Test Circuit

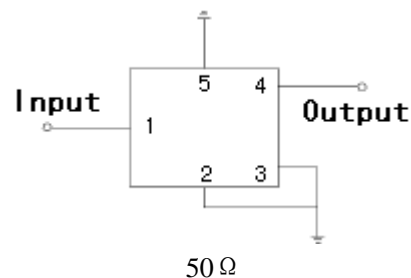


Typical Frequency Response


S21

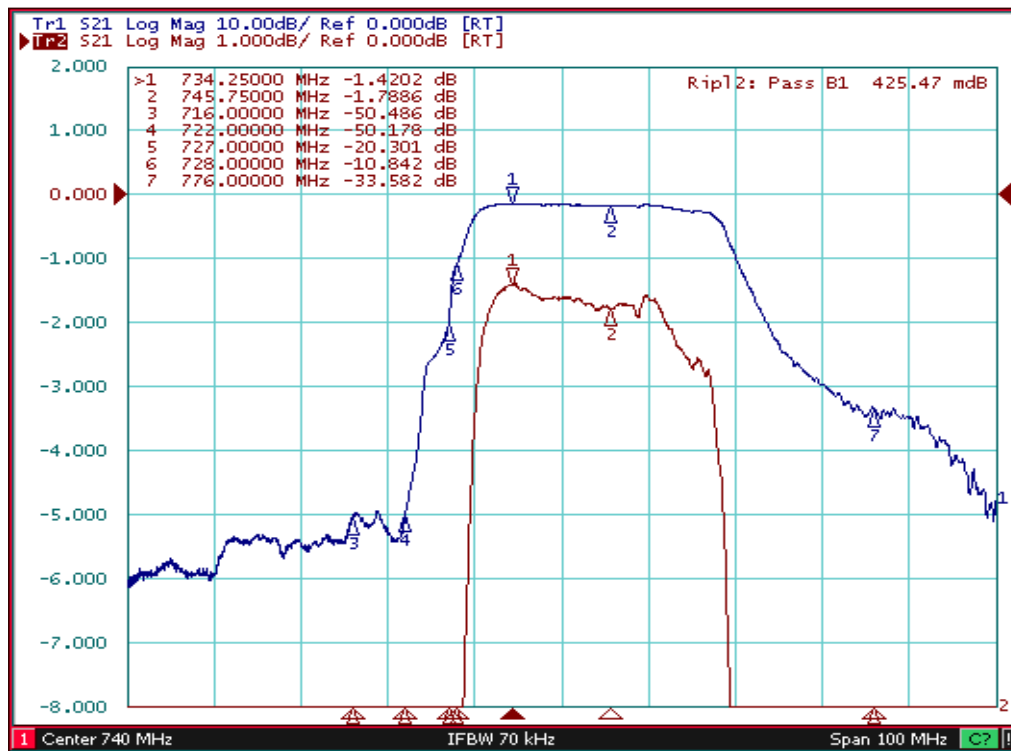

S11 S22

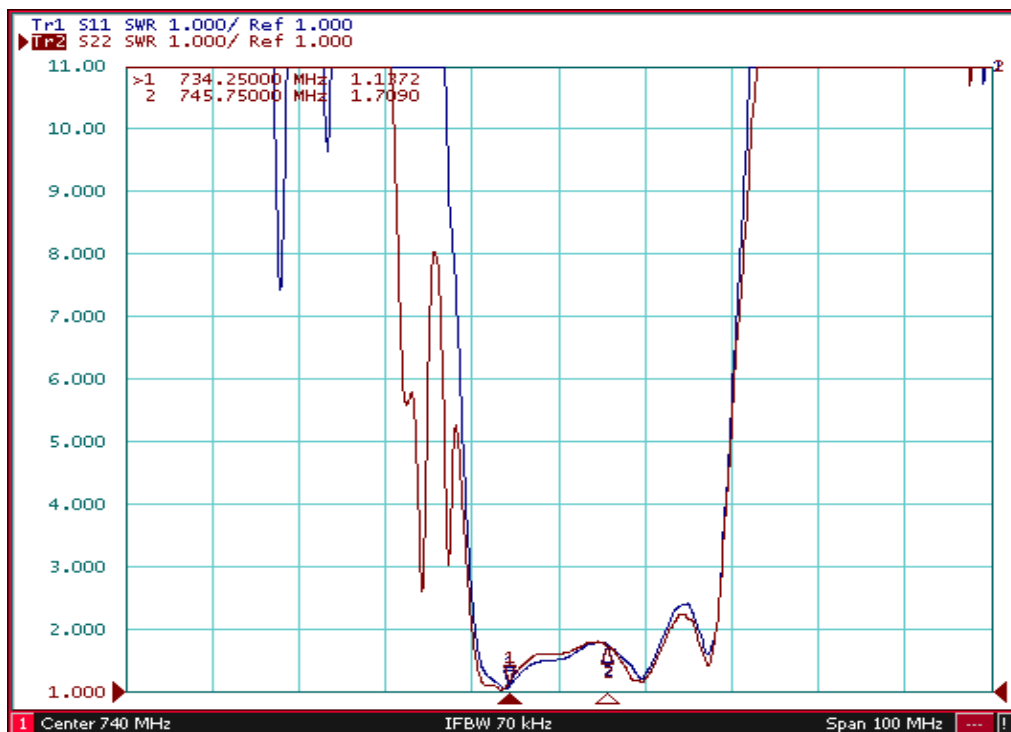

Far side

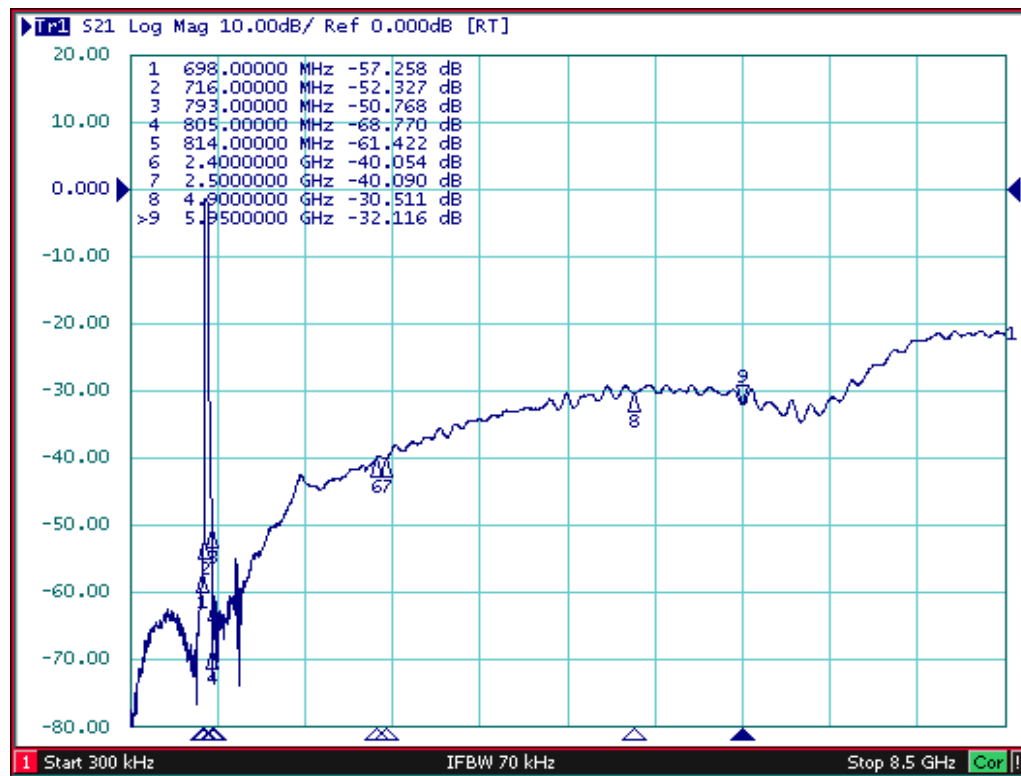




Stability Characteristics

Item No.	Test Item	STD Reference	Test Conditions	per lot
	Preconditioning	JESD22-A113	1) Temperature Cycling, 5 cycles -40°C to 85°C; 2) Bake, 24 hrs @85±5°C; 3)Moisture Soak, Soak time and conditions per IPC/JEDEC J-STD-020 based on device MSL level; 4) Reflow, 3 reflow cycles; 5) Drying, Room ambient temperature.	All behind
1	Temperature Cycling	JESD22-A104	-40°C / +85°C,5°C/min,15min dwell,<1 min transfer time,500cycles	3*25 pcs
2	High Temperature Storage	JESD22-A103	Temperature=85°C, 1000 hours.	3*25 pcs
3	Temperature Humidity no bias	JEDEC Std A101-B	85°C 85%RH 240 hours	3*25 pcs
4	Human Body Mode ESD	JESD22-A114	Ta=25°C, ≥100V	3 pcs
5	Charge Device Mode ESD	JESD22-C101	Ta=25°C, ≥100V	3 pcs
6	Solderability	JESD22-B102	Wetting: 245°C, 5s.	22 pcs
7	Drop Test	JESD22-B111	1500 Gs, 0.5 millisecond duration, half-sine pulse.	20 pcs
8	Mechanical Shock	JESD-47	Shock pulse of 1500g with pulse duration of 0.5+/-0.1msec (X ,Y & Z); 5 shocks per axis.	3*25 pcs


Requirements: The SAW filer shall remain within the electrical specifications after tests.

Packing Information

Carrier Tape

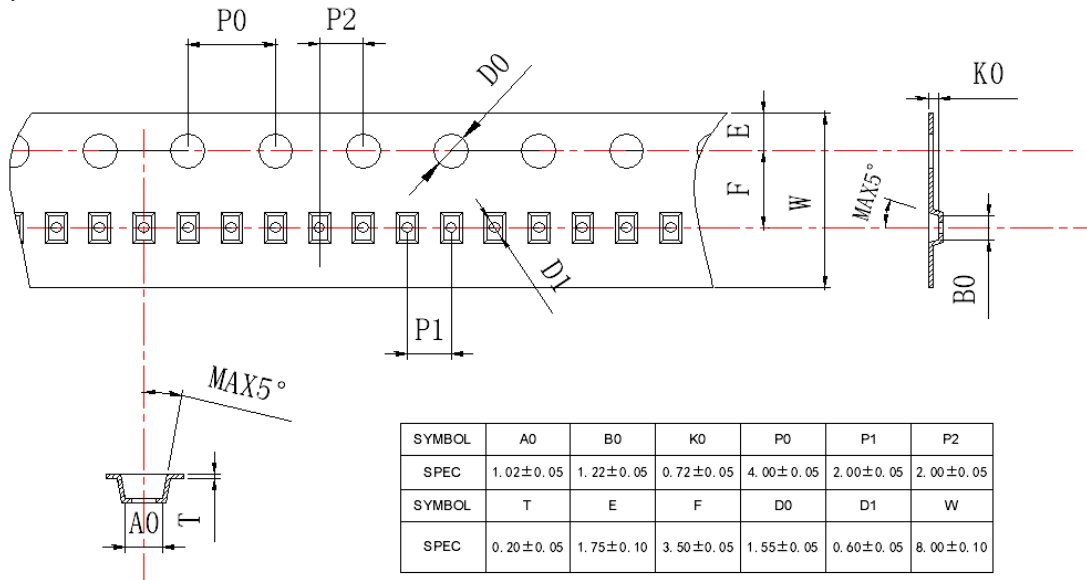

Reel Dimensions

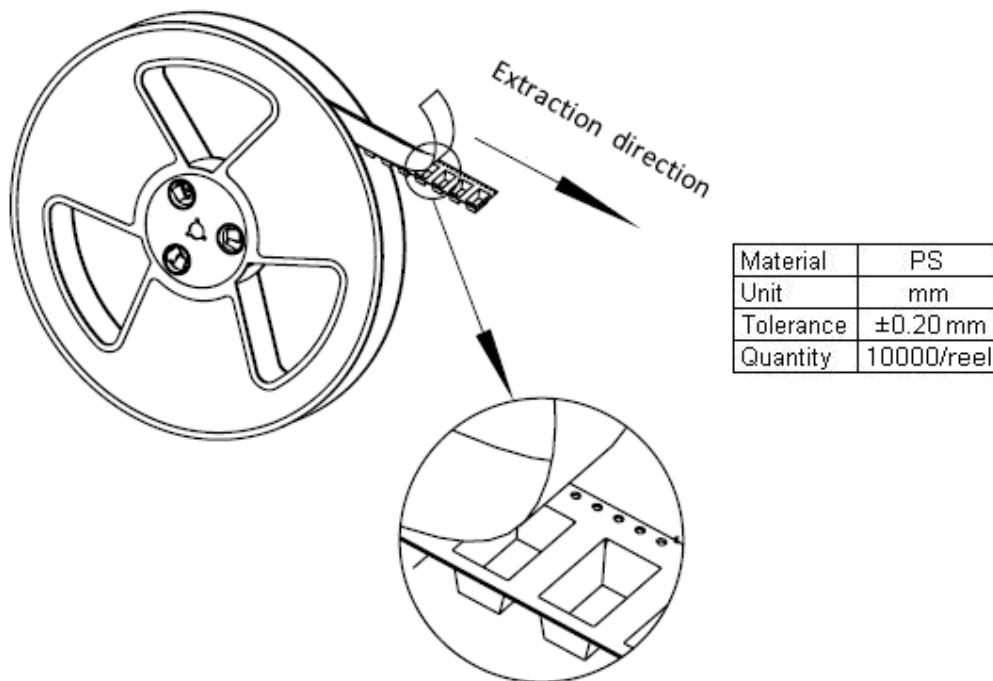

Outer Packing

Type	Quantity	Dimension	Description	Weight
Carton Box I	100000	240×210×285	anti-static plastic bag & carton box 1 reel / bag 10bags / box (100000 pcs) 30 bags / box (300000pcs)	2.15
Carton Box II	300000	470×310×285		6.22


Unit: mm

Unit: kg

Remarks

- SAW devices should not be used in any type of fluid such as water, oil, organic solvent, etc.
- Be certain not to apply voltage exceeding the rated voltage of components.
- Do not operate outside the recommended operating temperature range of components.
- Sudden change of temperature shall be avoided, deterioration of the characteristics can occur.
- Be careful of soldering temperature and duration of components when soldering.
- Do not place soldering iron on the body of components.
- Be careful not to subject the terminals or leads of components to excessive force.
- SAW devices are electrostatic sensitive. Please avoid static voltage during operation and storage.
- Ultrasonic cleaning shall be avoided. Ultrasonic vibration may cause destruction of components.

Recommended Soldering Profile

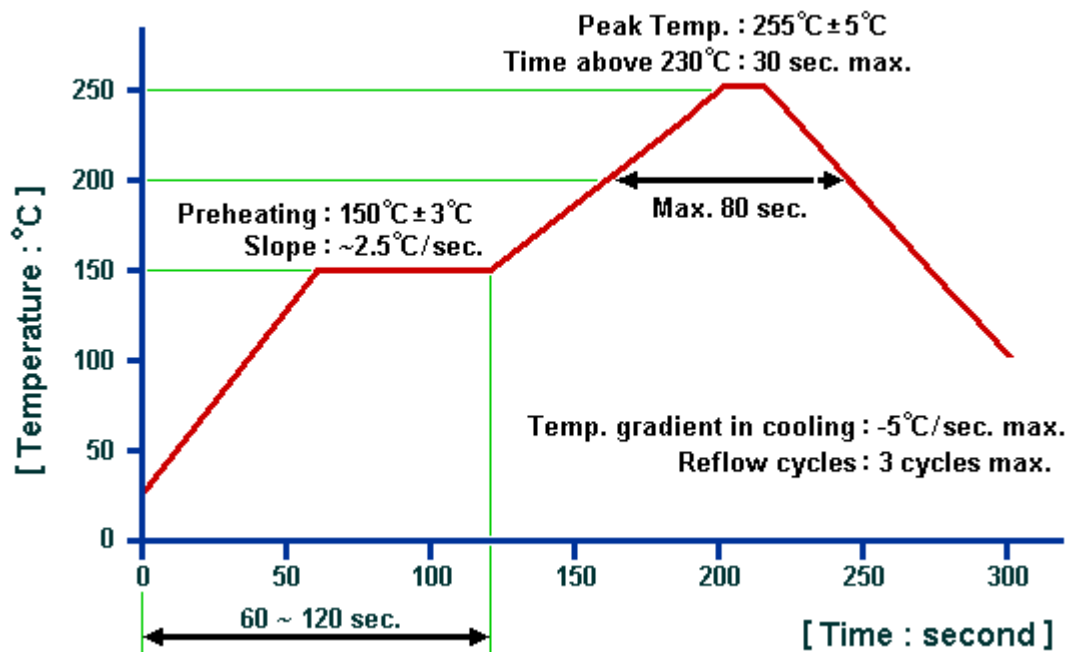

© ACT 2018. All Rights Reserved.

1. The specifications of this device are subject to change or obsolescence without notice.
2. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
3. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.