


1016 SMX-4 Series

1.6 x 1.2mm Crystal unit



RoHS & REACH compliant
Smallest crystal



Parameters	Specification	Remarks
Frequency range	F_nom 24.0MHz ~ 54.0MHz	
Frequency tolerance	F_tol ±10.0ppm ~ ±50.0ppm	
Frequency stability over operating temperature range	F_stb ±10.0ppm ~ ±50.0ppm	Table 2
Operating temperature range	T_use -20°C ~ +70°C, -30°C ~ +85°C, -40°C ~ +85°C	Table 2
Storage temperature	T_stg -45°C ~ +85°C	
Load capacitance	CL 8.0pF ~ 12.0pF	
Equivalent series resistance	ESR Table 1	
Shunt capacitance	CO 3.0pF max	
Drive level	DL 100µW max	50µW typical
Frequency aging	F_age ±2.0ppm at 25°C, 1 st Year	For ±1.0ppm please enquire
Moisture sensitivity level	MSL 1 (unlimited)	
Electrostatic discharge	ESD Not applicable	
Insulation resistance	IR 500MΩ min	At 100V DC


Table 1. Frequency range (MHz) vs ESR

24.0MHz ~ 29.999MHz	100Ω
30.0MHz ~ 39.999MHz	80Ω
40.0MHz ~ 54.000MHz	60Ω

Table 2 Frequency Stability vs Temperature

Temp. (°C)	Stability in ppm				
	±10	±15	±20	±30	±50
-20°C ~ 70°C	✓	✓	✓	✓	✓
-30°C ~ 85°C	✓	✓	✓	✓	✓
-40°C ~ 85°C	Enquire	Enquire	✓	✓	✓

Dimensions (mm)

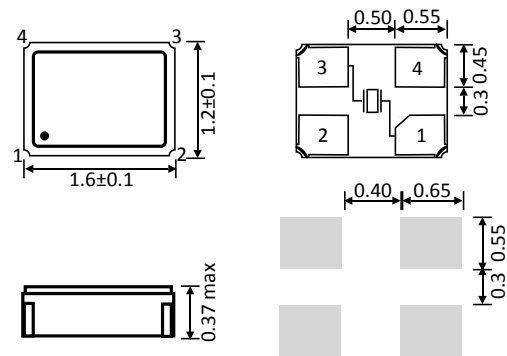

Part number generation

CAZ	2700	G	K	L	GO	F	L	-PF	
ACT Series Code	Frequency (MHz)	Frequency Tolerance (±ppm)	Frequency stability over temperature range (±ppm)	Operating Temperature Range (°C)	Load capacitance (CL -pF)	Frequency mode	Packaging (Tape & Reel)	Frequency aging	RoHS
CAZ	8MHz = 0800 27MHz = 2700 24.576MHz =2457 Note: Use the first 4 characters of the frequency in Hz i.e. 27MHz =27000000Hz part code =2700 If the frequency is 100MHz or higher than the first 5 characters are used	±10 = E ±15 = F ±20 = G ±30 = I ±50 = L	±10 = F ±15 = G ±20 = I ±30 = K ±50 = O	-20 ~ +70 = G -30 ~ +85 = L -40 ~ +85 = M	8 = GO 9 = JO 10 = KO 11 = MO 12 = OO	Fundamental = F	Loose = L 3000pcs = D	<u>Standard</u> ±2ppm=leave blank <u>Non standard</u> ±1ppm=1	RoHS = -PF

Note: It is important to suffix the above part number with full frequency required to give a completed part number as illustrated below.
Full Example Part Number : CAZ0800GKLGOL-PF [8.000MHz] , CAZ2700GKLGOL-PF [27.000MHz] , CAZ2457GKLGOL-PF [24.576MHz]

ACT (A wholly owned Acal BFi Company)
+44 (0) 118 978 8878 | sales@act.co.uk | www.act.co.uk
ISO9001 Registered


Specifications subject to change without notification

1016 SMX-4 Series

1.6 x 1.2mm Crystal unit



Solder Reflow Profile

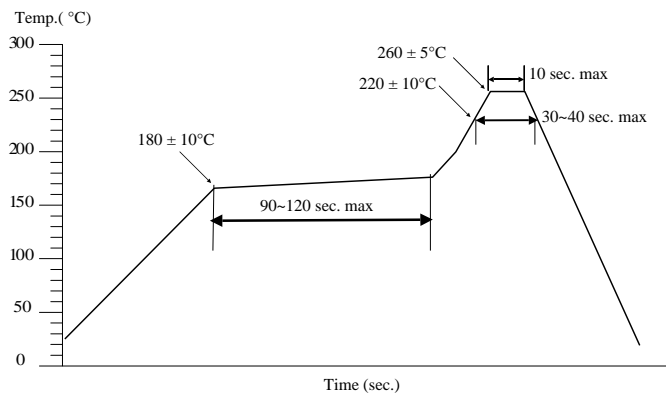

Additional information

Drawing control: (Internal use only)
Commodity code: 854160 00 00
Issue number: N1
Date: 01/2/2017
Internal reference: H2

ACT (A wholly owned Acal BFi Company)
+44 (0) 118 978 8878 | sales@act.co.uk | www.act.co.uk
ISO9001 Registered
Specifications subject to change without notification