


The **ACTQ0015/915.0/QCC8C** is a two-port, 180° surface-acoustic-wave (SAW) resonator in a surface-mount ceramic **QCC8C** case. It provides reliable, fundamental-mode, quartz frequency stabilization i.e. in transmitters or local oscillators operating at **915.000 MHz**.

1.Package Dimension (QCC8C)

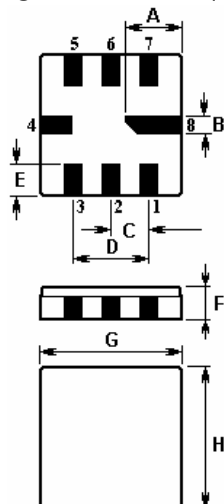


2.

Pin	Configuration
2	Input / output
6	Input / output
4,8	Case Ground
1,3,5,7	NC


Sign	Data (unit: mm)	Sign	Data (unit: mm)
A	2.08	E	1.2
B	0.6	F	1.35
C	1.27	G	5.0
D	2.54	H	5.0

3.Equivalent LC Model and Test Circuit

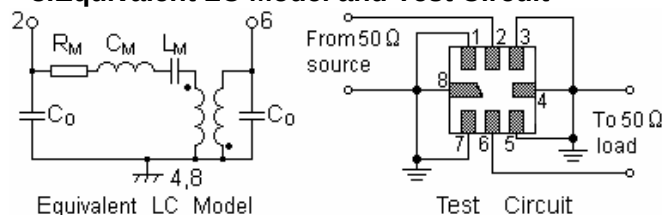


4.Typical Application Circuits

1) Low-Power Transmitter Application

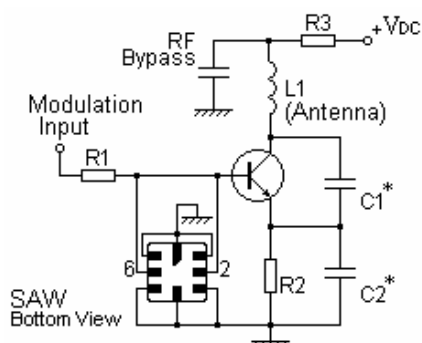

2) Local Oscillator Application

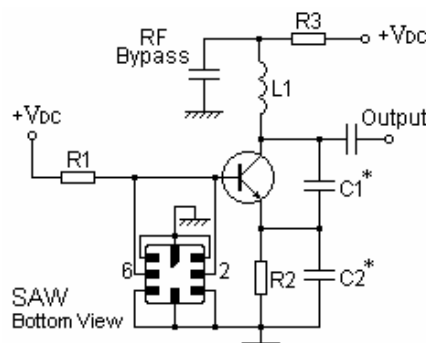

In keeping with our ongoing policy of product evolution and improvement, the above specification is subject to change without notice.


ISO9001: 2000 Registered

For quotations or further information please contact us at:

3 The Business Centre, Molly Millars Lane, Wokingham, Berks, RG41 2EY, UK


<http://www.actcrystals.com>

5. Typical Frequency Response

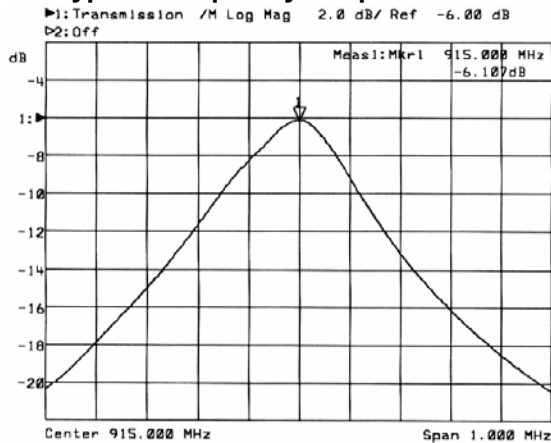

7. Performance

6. Temperature Characteristics

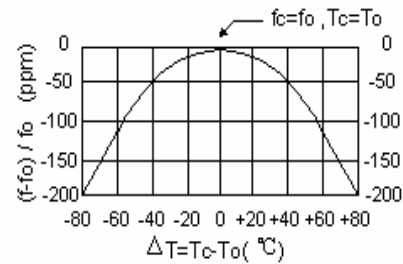

The curve shown above accounts for resonator contribution only and does not include LC component temperature characteristics.

7-1. Maximum Ratings

Rating	Value	Unit
CW RF Power Dissipation P	10	dBm
DC Voltage Between Terminals V_{DC}	± 30	V
Storage Temperature Range T_{stg}	-40 to +85	$^\circ\text{C}$
Operating Temperature Range T_A	-10 to +60	$^\circ\text{C}$

7-2. Electronic Characteristics

Characteristics	Sym	Minimum	Typical	Maximum	Unit
Centre Frequency (+25 $^\circ\text{C}$)	Absolute Frequency f_c	914.850		915.150	MHz
	Tolerance from 915.000 MHz Δf_c		± 150		kHz
Insertion Loss	IL		7.0	9.0	dB
Quality Factor	Unloaded Q Q_U		7,230		
	50 Ω Loaded Q Q_L		4,000		
Temperature Stability	Turnover Temperature T_0	25		55	$^\circ\text{C}$
	Turnover Frequency f_0		f_c		kHz
	Frequency Temperature Coefficient FTC		0.032		ppm/ $^\circ\text{C}^2$
Frequency Aging - Absolute Value during the First Year $ f_A $			≤ 10		ppm/yr
DC Insulation Resistance Between Any Two Terminals		1.0			M Ω
RF Equivalent RLC Model	Motional Resistance R_M		124	182	Ω
	Motional Inductance L_M		155.9291		μH
	Motional Capacitance C_M		0.1942		fF
	Shunt Static Capacitance C_0	1.10	1.35	1.60	pF

In keeping with our ongoing policy of product evolution and improvement, the above specification is subject to change without notice.

ISO9001: 2000 Registered

Issue : 1 C1

For quotations or further information please contact us at:

Date : SEPT 04

3 The Business Centre, Molly Millars Lane, Wokingham, Berks, RG41 2EY, UK

<http://www.actcrystals.com>

① CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!

1. The frequency f_c is the frequency of minimum IL with the resonator in the specified test fixture in a 50Ω test system with $VSWR \leq 1.2:1$.
2. Unless noted otherwise, case temperature $T_C = +25^\circ\text{C} \pm 2^\circ\text{C}$.
3. Frequency aging is the change in f_c with time and is specified at $+65^\circ\text{C}$ or less. Aging may exceed the specification for prolonged temperatures above $+65^\circ\text{C}$. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
4. Turnover temperature, T_0 , is the temperature of maximum (or turnover) frequency, f_0 . The nominal frequency at any case temperature, T_C , may be calculated from: $f = f_0 [1 - FTC (T_0 - T_C)^2]$.
5. This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance C_0 is the measured static (non-motional) capacitance between input terminal and ground or output terminal and ground. The measurement includes case parasitic capacitance.
6. Derived mathematically from one or more of the following directly measured parameters: f_c , IL, 3 dB bandwidth, f_c versus T_C , and C_0 .
7. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
8. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
9. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.

In keeping with our ongoing policy of product evolution and improvement, the above specification is subject to change without notice.

Issue : 1 C1

ISO9001: 2000 Registered

Date : SEPT 04

For quotations or further information please contact us at:

3 The Business Centre, Molly Millars Lane, Wokingham, Berks, RG41 2EY, UK

<http://www.actcrystals.com>